
Tuya Video GSM App – User Manual


Register an account

1.Download the app by scanning the QR code OR download directly from the APP Store.

Smart Life app

2.Register an account or sign in if you already have an account. ENSURE you use the correct country upon registration.







3.Add Device

3.1 Power on the device, and you will hear a voice prompt ‘4G mode’
3.2 Open the Smart Life app Home page. Tap the plus (+) icon in the top .
3.3 Scan a unit's QR code for connection.
3.4 Waiting for connection--done.

Note: Devices with Wi-Fi mode only support 2.4 GHz Wi-Fi and do not support 5 GHz Wi-Fi.

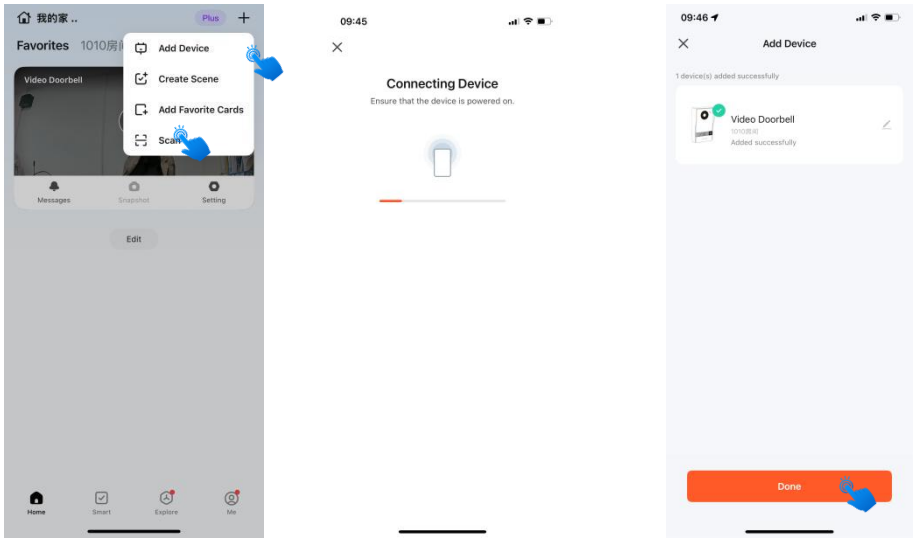

This screen displays the live video feed from your doorbell camera.

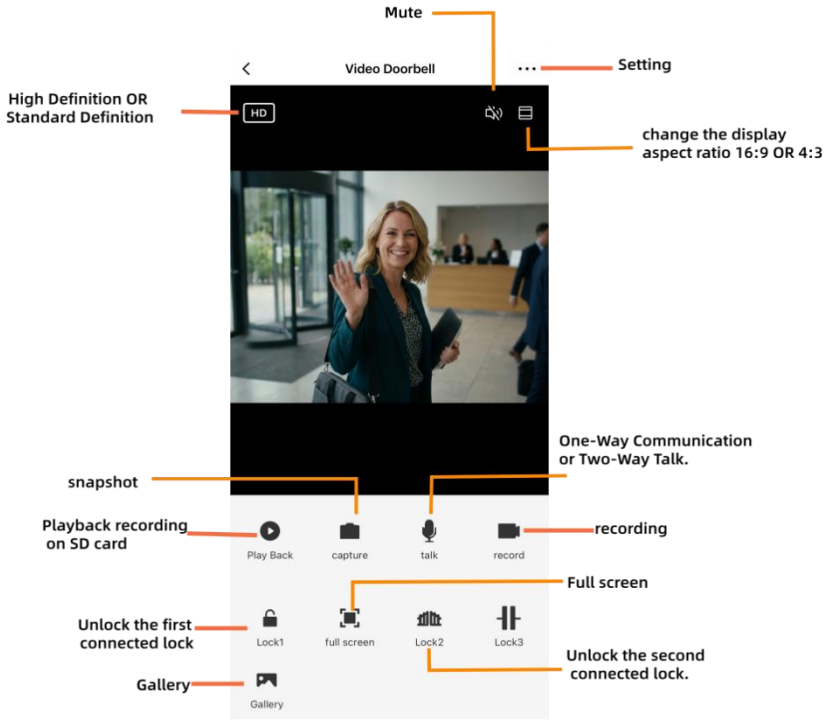



Device Setting

Tap “View the Device" to enter the device monitoring interface, then tap the “ • • • “ icon in the upper-right corner to enter Device Settings.

1.**Device Information**: View technical details about your doorbell, such as the device ID, IP address, and signal strength.

2.Tap-to-Run and Automation: Create smart scenes and automation rules,for Tuya smart home system. For example, one-click unlock.

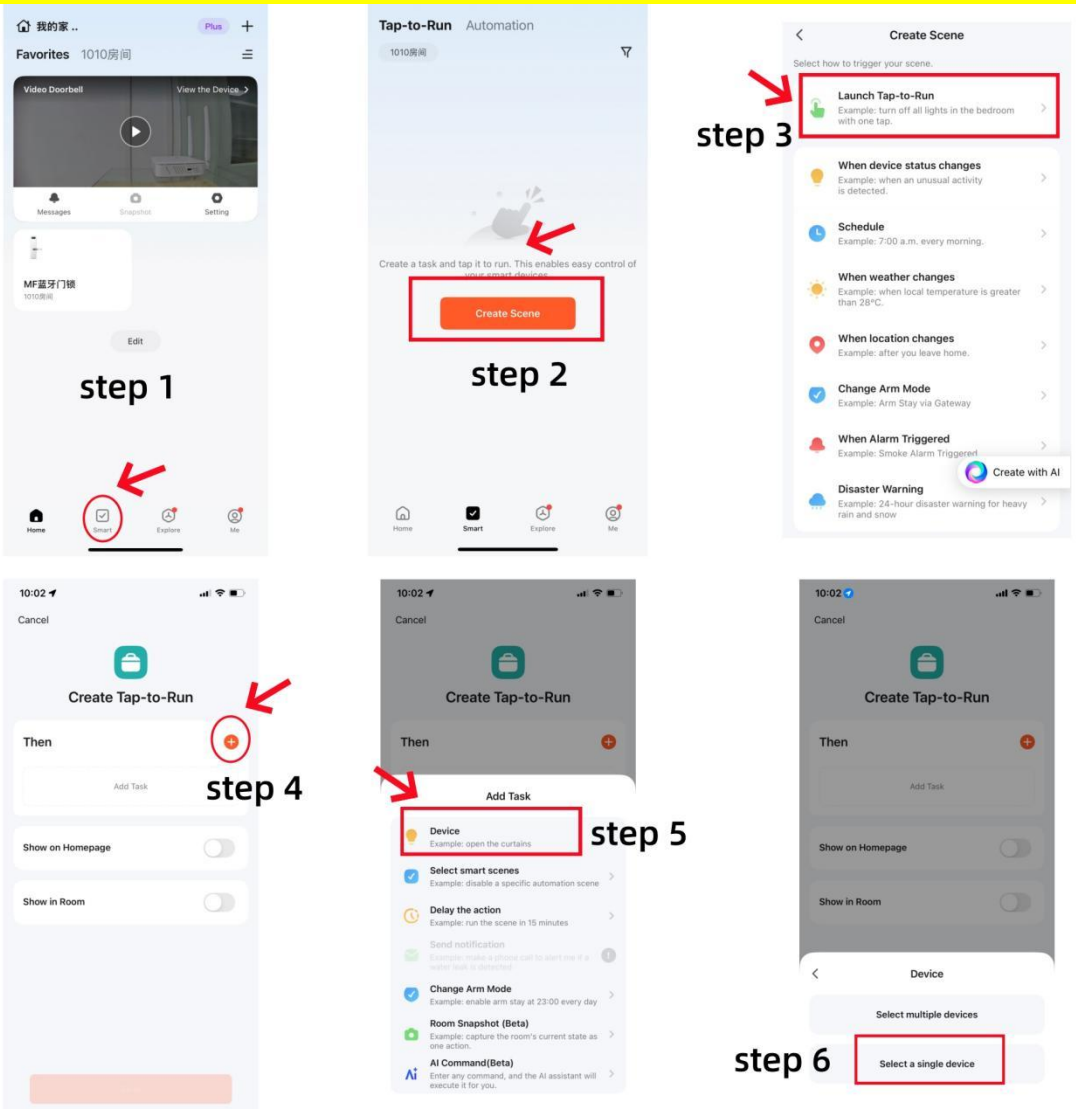

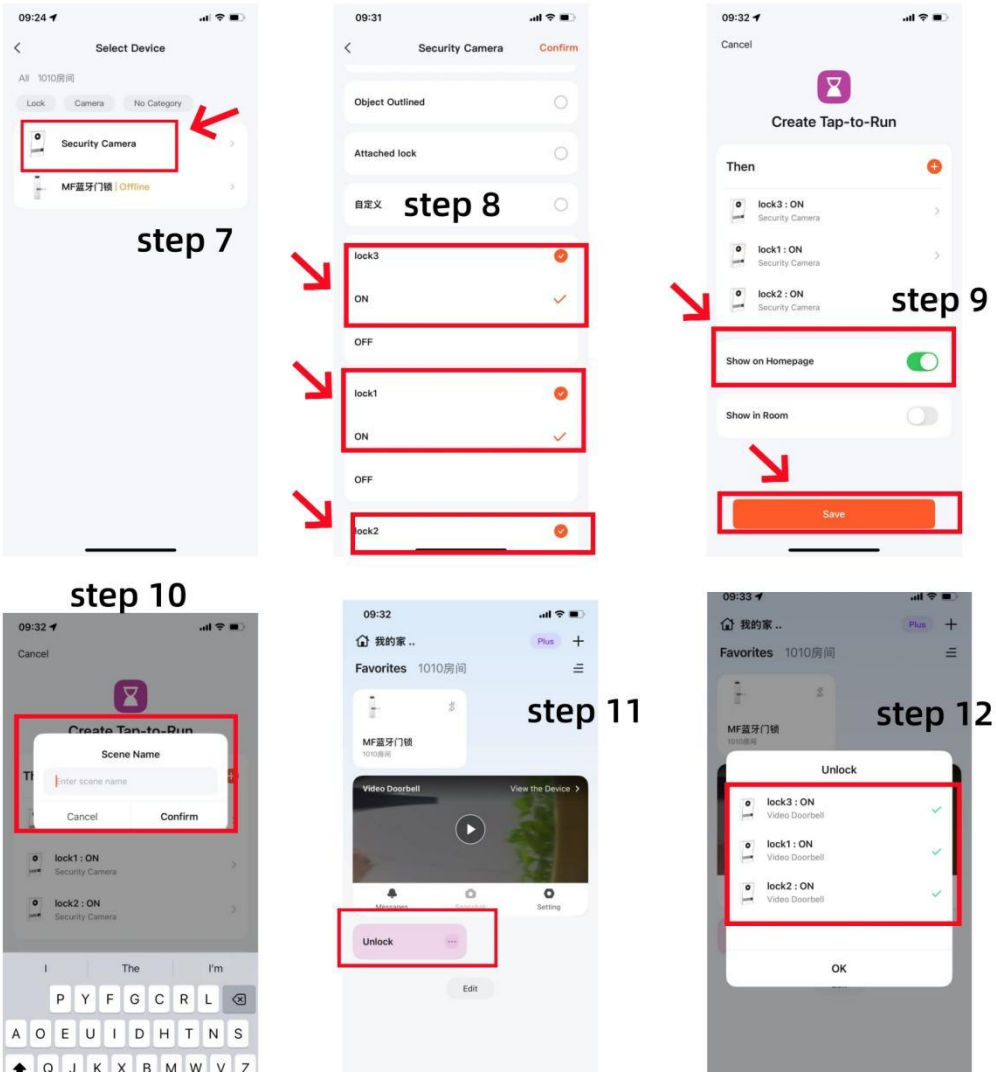


3.Check Device Network: for Tuya other units.


4.Share Device: Grant family members or trusted individuals access to your doorbell's camera feed and notifications and using the control buttons.

4.1 Share device via Home Management

Note: The shared accounts are allowed to have unlock functions.


Step 1: Create a home(setting home name)

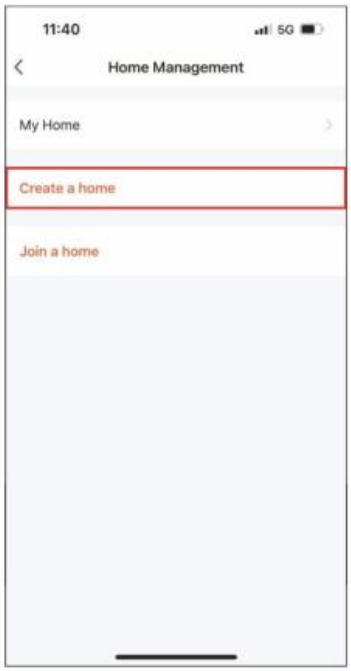


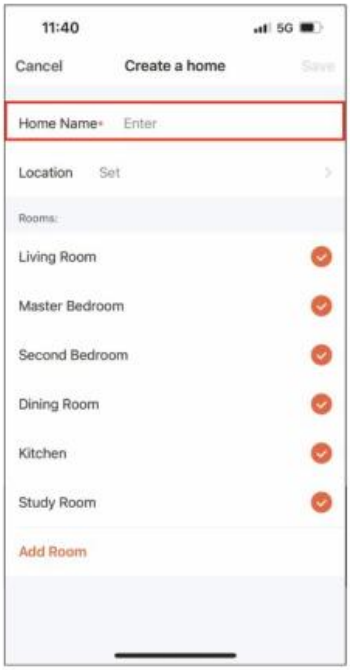


Step 2: Add member (enter member's Tuya account)

Step3: Choose the home and Add device.

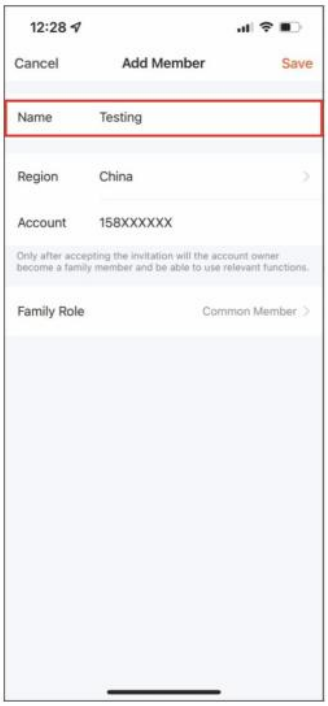

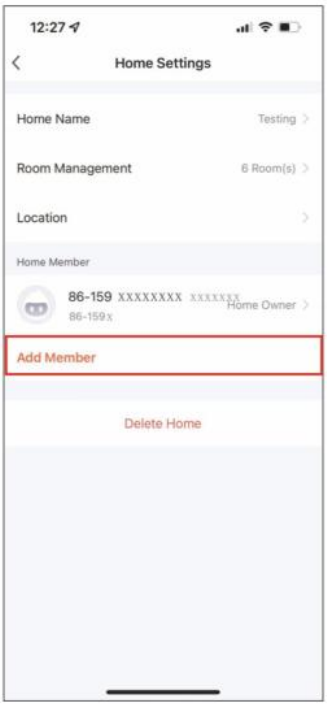


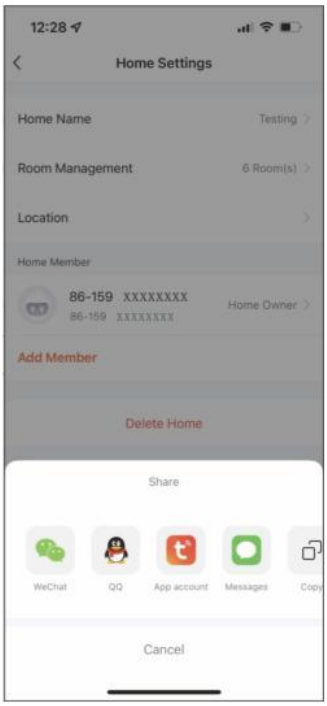


One new member's account, select the suitable home to operate the device.

4.2 Share device with your friends

Note: The shared accounts are no allowed to have unlock functions.

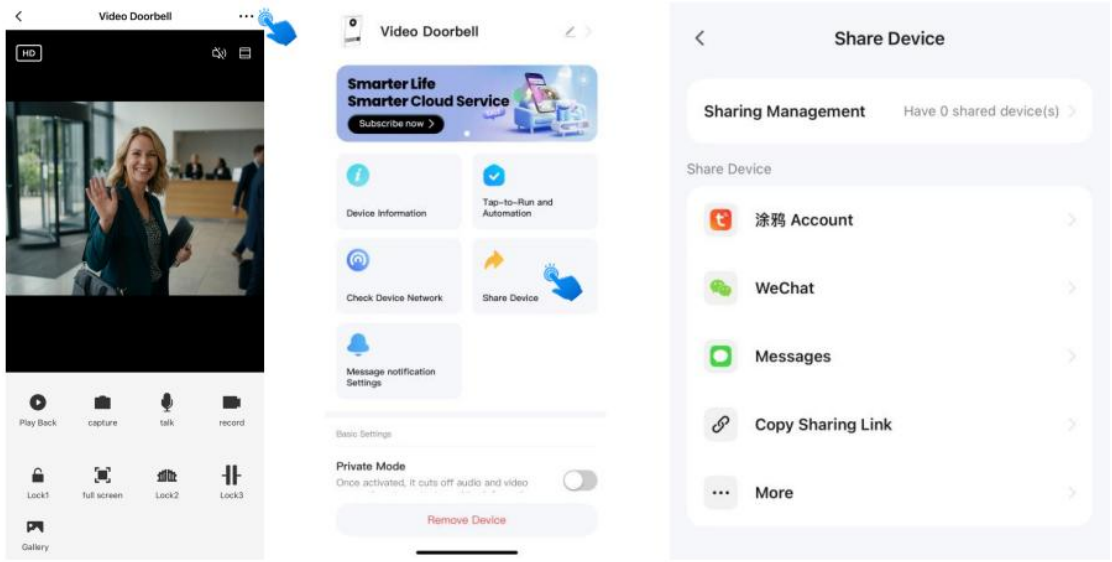

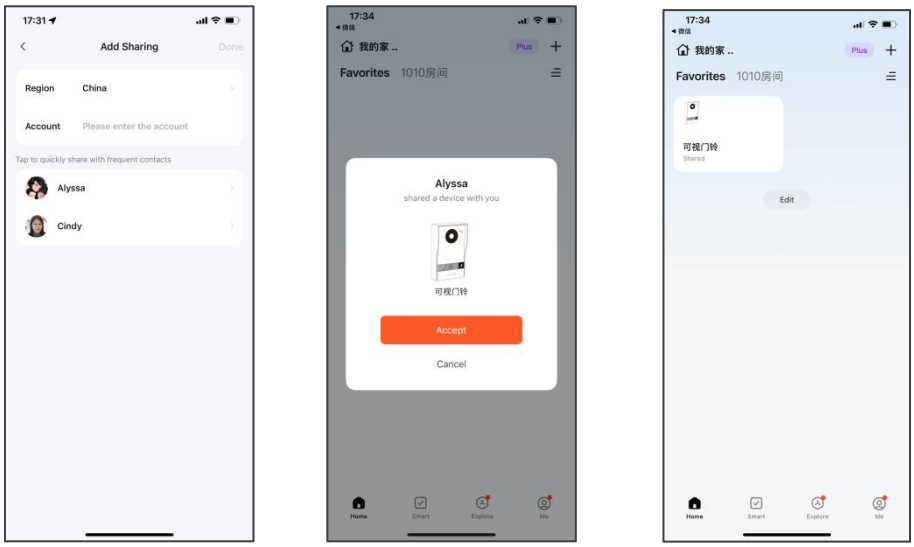


Basic & Advanced Settings- Basic Settings

Basic Settings

4.Audio Settings:

One-Way Communication: press and hold the intercom button to speak.
Two-Way Talk: tap the talk button to start a real-time conversation. （factory default）

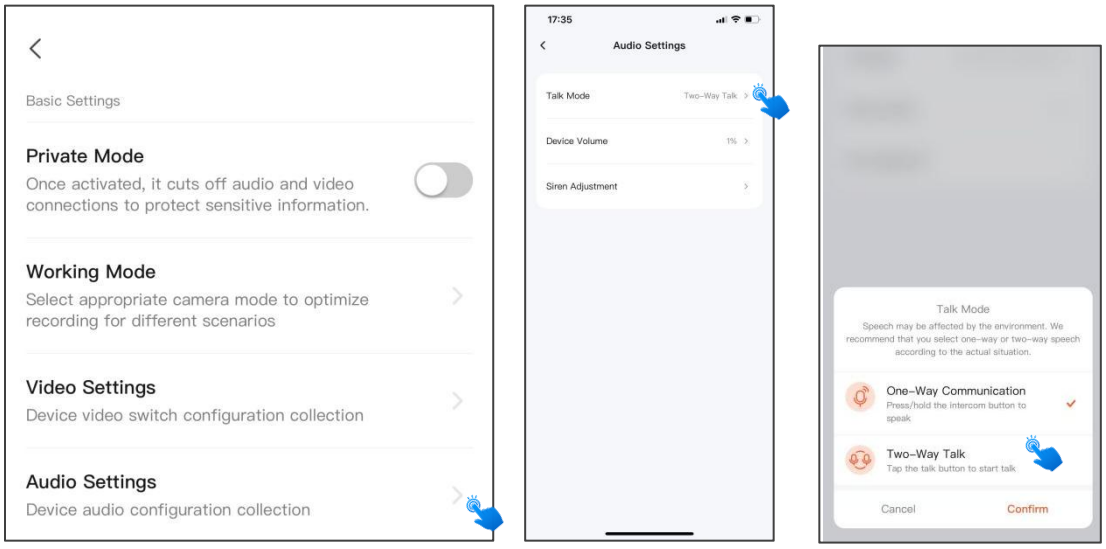


Advanced Settings---for other Tuya units.

5. **Detection Alarm Settings**.

6. **Power Management Settings:** for low-power battery products.

7. **Bell Settings.**

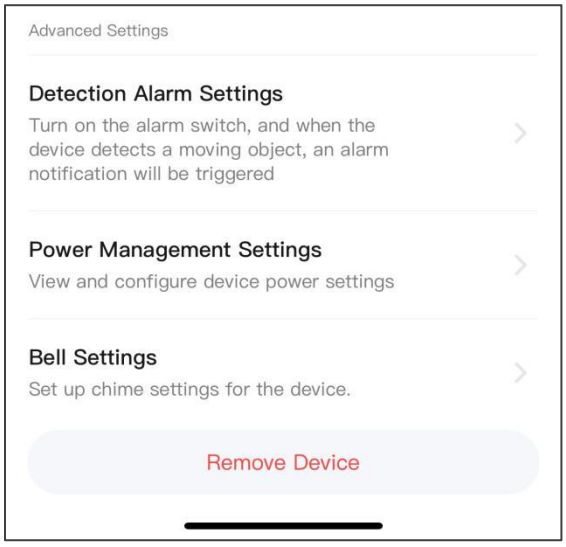


Storage, Network & General Settings

1.Storage Settings: View and configure storage functions, including Micro SD card status, capacity, and cloud storage options.

2.Recording Settings: Device video recording function settings. After setup is completed, recordings can be played back through the Video Doorbell Monitoring

Interface.

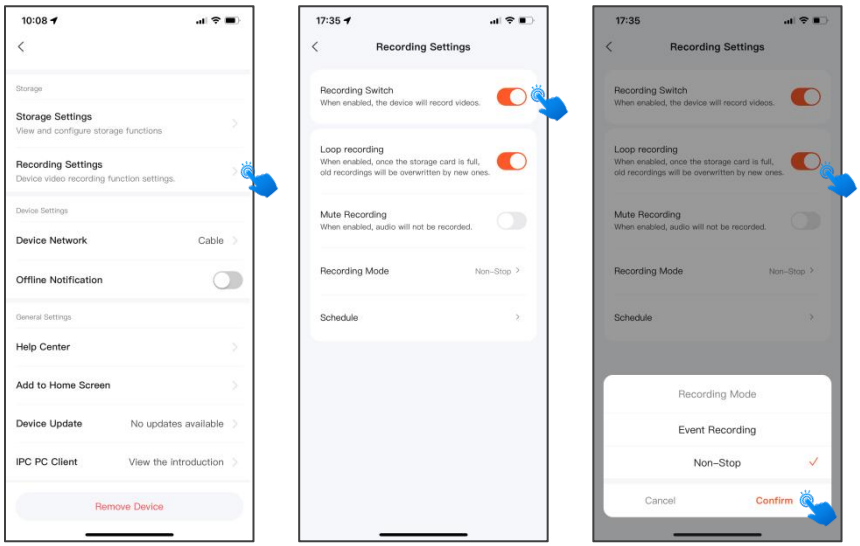


3.Device Network: for other Tuya units.

4.Offline Notification (Toggle Switch): for other Tuya units.

5.Device Upgrade

To check your device's current version or verify if a firmware update is required. If your system is fully updated, it will read "No updates available."


Auto Upgrade (Toggle Switch): Turn this setting switch on to allow the system to download and install firmware automatically when they become available.

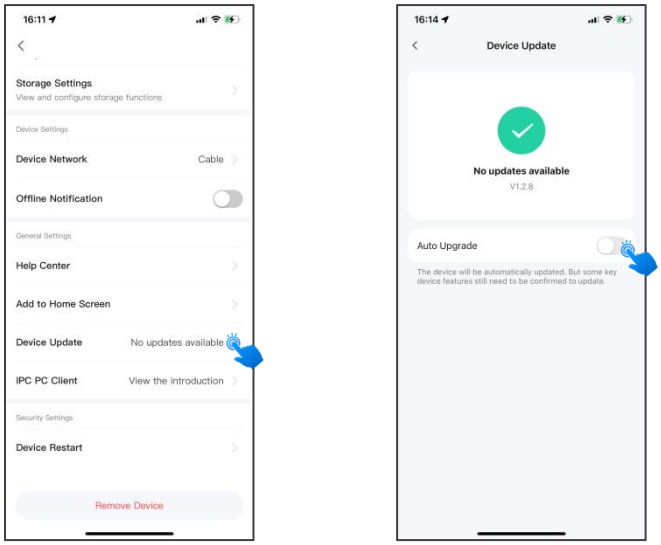

Remove Device

Remove: Disconnects the device from your current Tuya Smart app account. The device will be released, allowing it to be paired again or bound to a new account. Your historical cloud data, local logs, and custom device preferences are typically preserved.

Remove and Clear Data: Disconnects the device from your account and permanently wipes all related data from the app and device history.

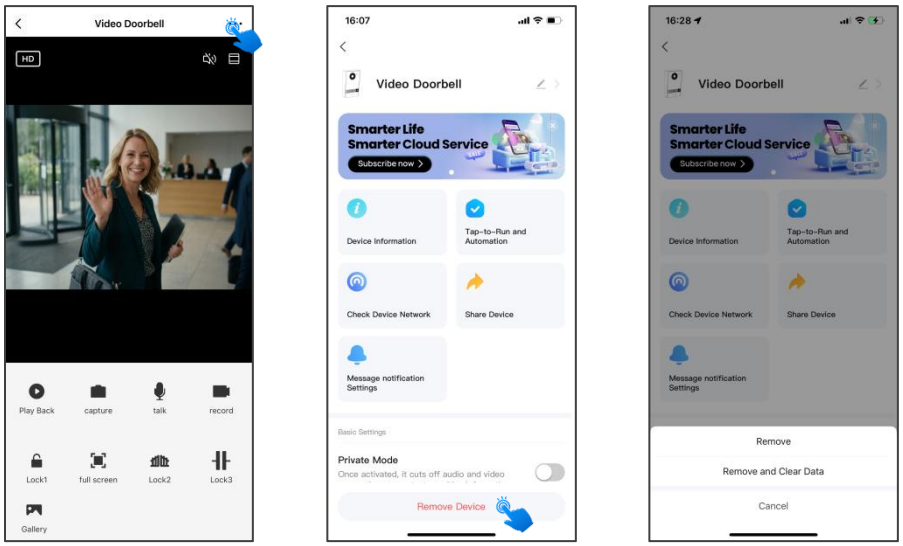

Tuya can be ON/OFF via SMS.

Default calling mode(with SIM card, the door unit calls the App. firstly default.)
1.App. smart life is not linked.
Send SMS CCCC#24*#1(door unit restart), door unit will call mobile phone directly.
Note: 0=App. mode ON. 1=App. mode OFF.
At this time, if you want to bind App., please send SMS CCCC#24*#0(door unit restart), switch ON App. mode, then can bind it.

2, App. smart life already linked.
Send SMS CCCC#24*#1(door unit restart), door unit will call mobile phone directly. At this time, you can still monitor/unlock the door unit via App.
Note: But if you want the door unit call the App.,please send SMS CCCC#24*#0, switch to App. mode.